

2J Aerosol Photometer



Unmatched user conveniences, data integrity and security, and calibration precision from the world's most trusted photometer manufacturer.



Key Features

- **21 CFR Part 11 compliant** for collected data¹
- **ISO/IEC 17025 accredited calibration**²
- Can be powered by an external battery for portable use
- Multiple user levels for greater data integrity and security¹
- Large 17.8 cm (7 in.) color touchscreen with easy-to-read viewing angle
- Wi-Fi and USB connectivity for easy data transfer¹
- Firmware updates can be performed by the user

¹ 2J PRO model only

² All calibrations from ATI USA and ATI UK facilities are ISO/IEC 17025 accredited. For calibrations outside ATI, contact your local service center.

Models

- **2J:** Standard features (see inside)
- **2J PRO:** Standard 2J features plus data storage, data security, leak test traceability, and multiple user levels
- **2J-N:** Hardware designed for hazardous environments, meets ASME N511, ASME N510, ASME N509, and ASME AG-1
- **2J-N PRO:** Standard 2J-N features plus data storage, data security, leak test traceability, and multiple user levels




USER CONVENIENCES

Get the job done faster with a user-friendly interface and ergonomic hardware.

Intuitive, Easy-to-Use Interface

- Fast and easy setup—begin scanning right away
- Critical leak test parameters displayed on screen
- Easy to change Reagent, Upstream Concentration, and Alarm Set Point
- Users can perform firmware updates to add features
- Supports multiple languages
- On-board help

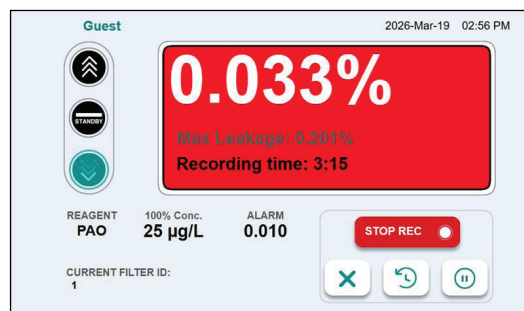

Alarm state is highly visible and audible

Hardware Engineered for Convenience

- 17.8 cm (7 in.) scratch-resistant color touchscreen compatible with nitrile gloves
- Angled high-resolution display for optimal viewing
- Standby Mode turns off the pump, extending battery life and minimizing noise
- Lightweight, 7.7 kg (17 lbs) and durable
- Enhanced flow control: $\pm 5\%$
- Easy to wipe clean



Hardware is designed for ease of use

Key Functions Controlled Directly from J-Probe

- Large, 10.9 cm (4.3 in.) color touchscreen
- Enable the Upstream/Downstream/Standby functions from J-Probe
- Start and Stop leak scans from the J-Probe
- Send leak test results to the optional thermal printer



J-Probe's ergonomic design provides efficient operation of the photometer

External Battery (Optional)

- The 2J can be operated with an external battery
- Use any commercially available battery (min. 100W output with USB-C connection)
- External battery is hot-swappable within 10 seconds, avoiding shutdown when switching to/from battery power
- Scan ~20 standard 0.61 x 1.22 m (2 x 4 ft) HEPA filters with normal operation using a 26K mAh capacity battery³



External battery for ease of use

³ Using battery purchased from ATI. Individual performance may vary. Visit www.ATITest.com for specifications.




DATA INTEGRITY AND SECURITY

2J PRO model only

The 2J PRO offers unmatched leak test traceability, data storage and reporting.

Leak Test Results Traceability

- Leak test IDs provide traceability of each saved leak test
 - User ID
 - Filter ID
 - Job ID
 - Room ID
 - Customer/Site ID
- Leak test IDs are included with all saved and printed reports

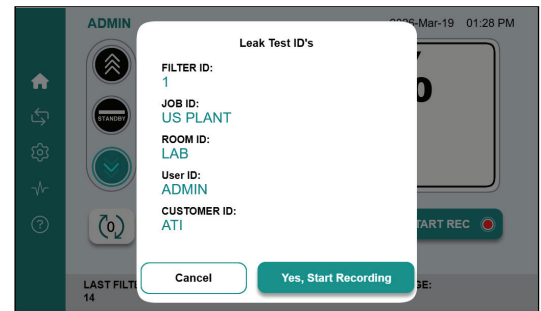

Leak test IDs

Data Storage and Reporting

- Leak test results are saved as a PDF (Summary and Detailed) and CSV file
- 64GB of storage, up to 150,000 saved scans
- Data retrieved after applying filters
- Data can be exported via Wi-Fi, USB flash drive, or optional thermal printer
- Previously saved leak test results are viewable on the unit



Data transfer

Model:	2J Aerosol Photometer
Base Serial Number:	73502
Probe Serial Number:	72889
Probe Type:	J-Probe
Firmware Version:	1.0.0.1
Cal Due Date:	2027-03-04
Current Date:	2026-03-12
=====	
Job ID:	123456
Room ID:	00313
Filter ID:	00016
User ID:	userID9
Customer ID:	ATI
Setup:	Internal Ref
Agent:	PAO
Actual Concentration:	
Upstream Concentration:	95
Rewind count:	
Scan Start Time:	2026-03-12, 15:51:40.268
Scan End Time:	2026-03-12, 15:52:11.976
Effective Scanning Time:	0000-00-00, 00:00:20.397
Leakage Alarm % Value:	0.0009
Max Leakage % Value:	0.0014
Alarm Exceeded:	YES
=====	
Scan Comments:	"REST"
Operator Signature:	_____
Witness Signature:	_____
=====	
2026-03-12 15:51:40.340	0.0010 FAILED
2026-03-12 15:51:40.738	0.0010 FAILED
2026-03-12 15:51:41.140	0.0010 FAILED
2026-03-12 15:51:41.791	0.0010 FAILED
2026-03-12 15:51:41.988	0.0012 FAILED

PDF summary report



DATA INTEGRITY AND SECURITY

2J PRO model only


Choose the 2J PRO when data integrity and security are critical.

Data Security

- Saved leak test results cannot be edited on the 2J, meeting **21 CFR Part 11 requirements**
- Saved leak test data can be password protected
- User login for additional data integrity and traceability

Multi-User Level Access

- Four user levels – Administrator, Supervisor, Technician, and Guest
- Each user has a unique username and password
- Administrator can determine which functions are available for each user level
- Up to 250 users can be created

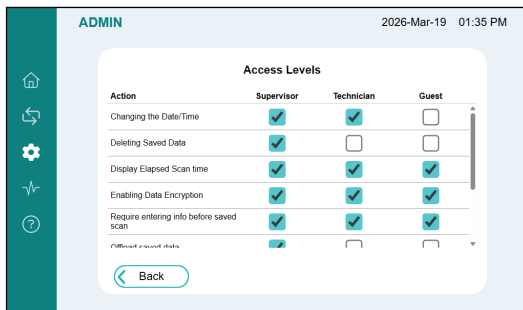

User access level screen

Audit Trail

- **21 CFR Part 11 compliant** with 30,000 recorded activities
- Captures all changes with date/time stamp:
 - System settings
 - Operational settings
 - User log in / log out
- Only Administrator level user can download the audit trail

2J vs. 2J PRO

FEATURE	2J	2J PRO
Data Integrity and Security: • Test results traceability • Leak test data storage and reporting • Data security • Multi-user level access • Audit trail		✓
User Conveniences: • Intuitive, easy-to-use interface • Hardware engineered for convenience • Key functions controlled directly from J-Probe • External battery (optional)	✓	✓
Supports multiple languages	✓	✓
ISO/IEC 17025 accredited calibration from ATI	✓	✓
Thermal printer compatibility	✓	✓
User-enabled firmware updates	✓	✓
On-board help	✓	✓



Short 2J product video



SPECIFICATIONS AND ACCESSORIES

PRODUCT SPECIFICATIONS

Dimensions (L x W x H)	39.1 cm x 25.4 cm x 17.8 cm (15.4 in. x 10.0 in. x 7.0 in.)
Weight	7.7 kg (17.0 lbs)
Display/Touchscreen	17.8 cm (7 in.) scratch-resistant color touchscreen Supports multiple languages
Power	Minimum Input Power and Connection: 100W, USB-C Included Power Adapter Specifications: Input: 100 to 240V, 50/60 Hz Output: 100 watts USB-C
Auto Zero	Automatically establishes zero reading at startup User-enabled re-establish zero
Alarm	User-selectable audible, visual, and vibratory (J-Probe only)
Flow Control	1 cfm (28.3 lpm) +/- 5%
Reagent Settings	PAO-4, PAO-4 High, DOP (DEHP), DEHS (DOS), Ondina, Paraffin, User-Defined Reagents
Dynamic Range	0.0001 mg/m ³ (µg/l) to 120 mg/m ³ (µg/l) Up to 600 mg/m ³ (µg/l) PAO High
Accuracy	1% of readings (0.01% to 100%)
Repeatability	0.5% of readings > 0.01% to 100%
Data Output	Thermal printer (optional), USB, Wi-Fi (2J PRO only)
Data Storage (2J PRO only)	Up to 64GBs. Data cannot be edited per 21 CFR Part 11
Reports (2J PRO only)	Leak test results saved as a PDF (Summary and Detailed) and CSV file
Standards Compliance	
Industry	21 CFR Part 11, ISO 14644-3, NSF-49, IEST-RP-CC034, EN 12469, ISO/IEC 17025 (ships from ATI with ISO/IEC 17025 accredited calibration)
Electrical & Safety	CE, UKCA, EN 61010-1:2010, EN 61326-1:2021, FCC Part 15 Subpart B, ISED Canada ICES-003 Issue 7

Product Bundles

- ☐ **2J Bundle, p/n 2J-BNDL**
2J, J-Probe, Case
- ☐ **2J PRO Bundle, p/n 2J-PRO-BNDL**
2J PRO, J-Probe, Case
- ☐ **2J-N Bundle, p/n 2JN-BNDL**
2J-N, J-Probe, Case
- ☐ **2J-N PRO Bundle, p/n 2JN-PRO-BNDL**
2J-N PRO, J-Probe, Case

Optional Accessories

- ☐ **Thermal Printer, p/n 2J-THERM-PRNT**
- ☐ **External Battery, p/n 2J-EXT-BTY**
(see page 2)



Carrying case

- Holds bundle plus thermal printer and external battery



Thermal printer

- Rechargeable internal battery
 - 58 mm (2.25 in.) wide thermal paper
- Visit www.ATItest.com for specifications



Scan for
more info